



G

WK W X

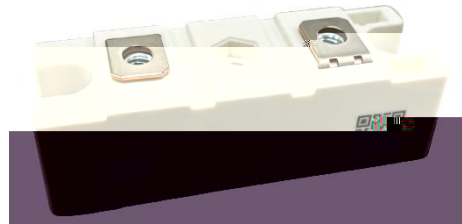

XT X

C W V F T

| CT T XX | I T X | H |
|---------|-------|---|
| 44/     |       |   |
| † °C    |       |   |
| † / 2   |       |   |
| ( /     |       |   |

VT

+

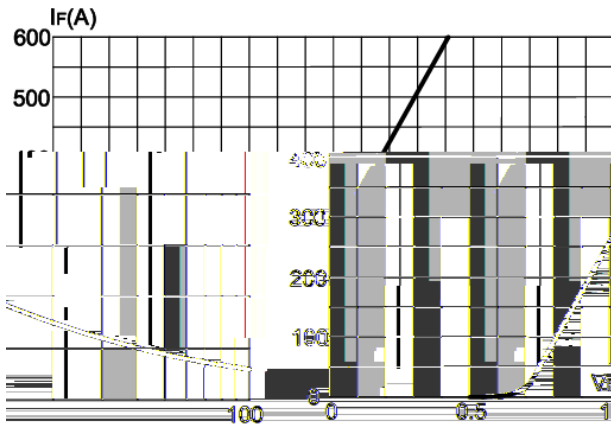
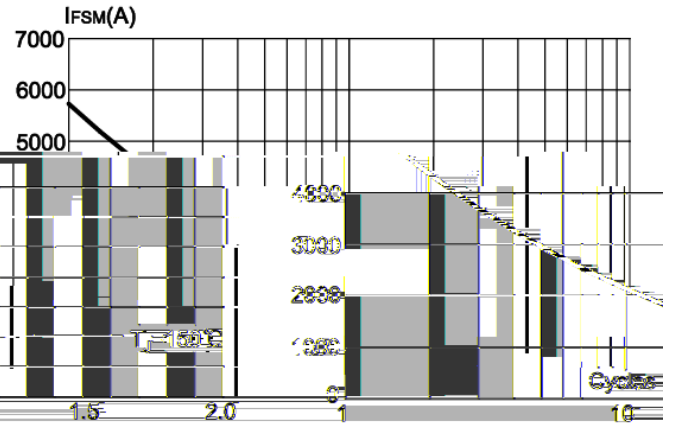
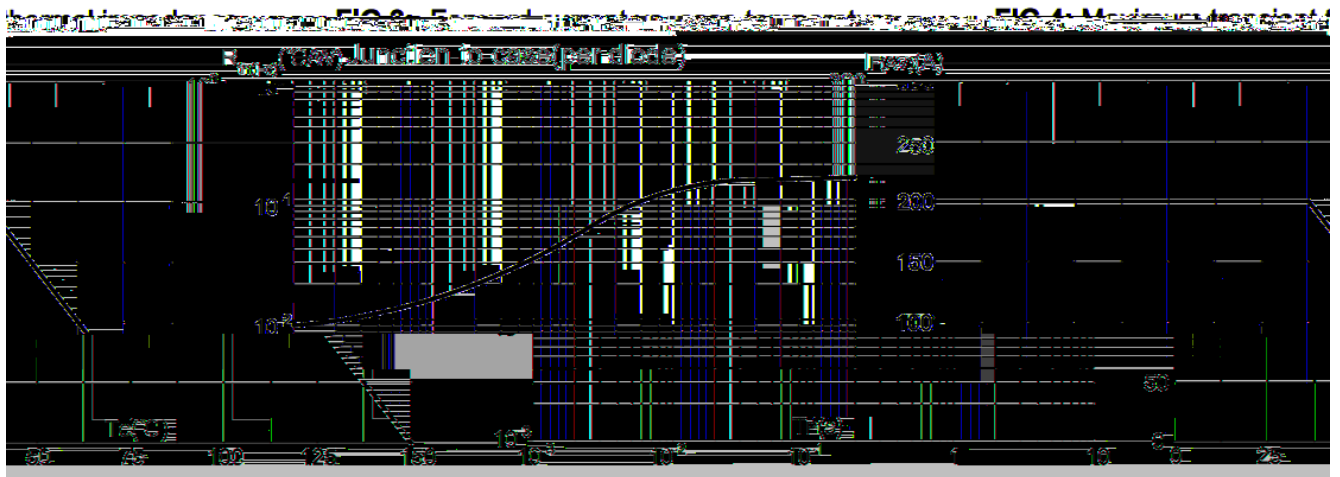


U X T ET

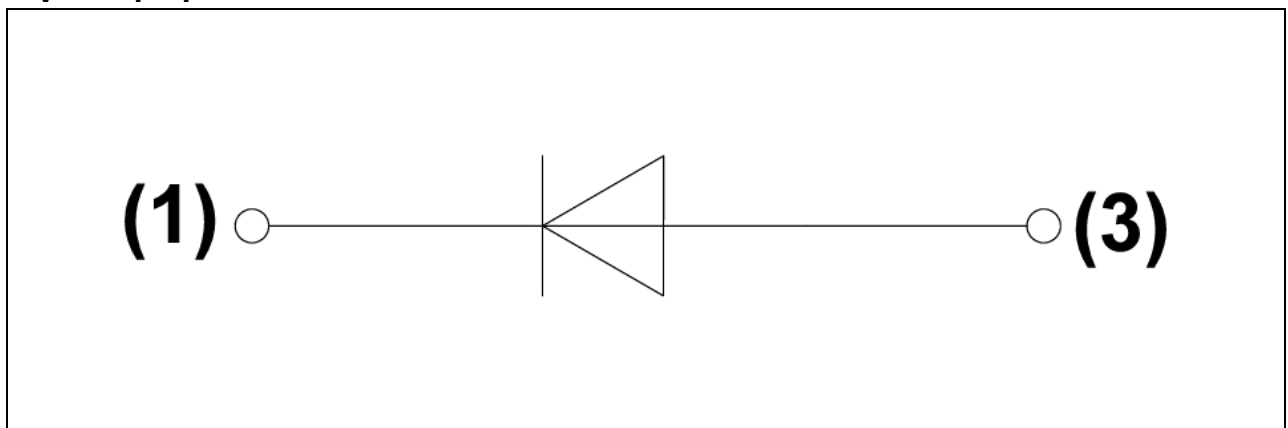
| CT T XX | W  | F U | I T X | H |
|---------|----|-----|-------|---|
| 4       |    | 44/ |       |   |
| 0       |    | 4 / |       |   |
|         |    | †   |       |   |
| (       | °C | † / |       |   |
| +       |    | +   |       |   |
| 4/      |    | +1  |       |   |
| ,       |    | ,   |       |   |
|         |    |     |       |   |

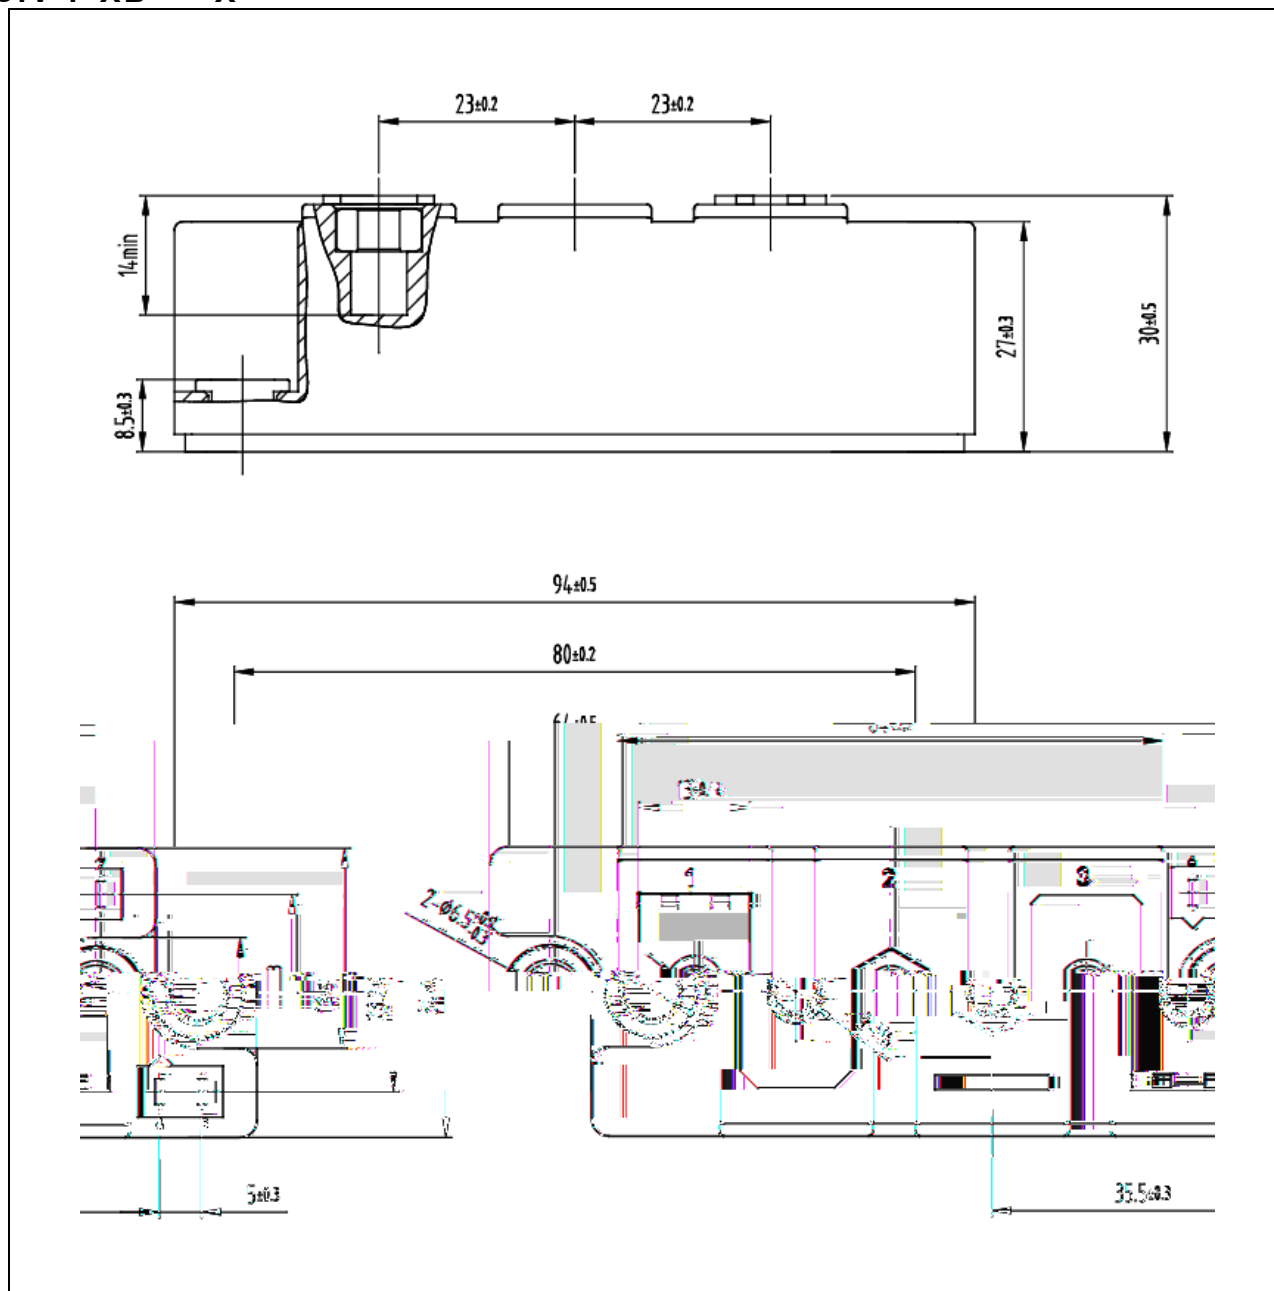


G VT XV VT GX T TTVX V

**FIG.1: Forward characteristics(per diode)**

**FIG.2: Peak on-state surge current**


V T T



**CTV T XB X**




G



+

, , ,

.

0

2

, , ,

, , ,



, , ,

.

, , ,

.