




| °C |  |  |
|----|--|--|
|    |  |  |
|    |  |  |



|  | °C |  |  |    |
|--|----|--|--|----|
|  |    |  |  |    |
|  |    |  |  |    |
|  |    |  |  |    |
|  |    |  |  | °C |
|  |    |  |  | °C |

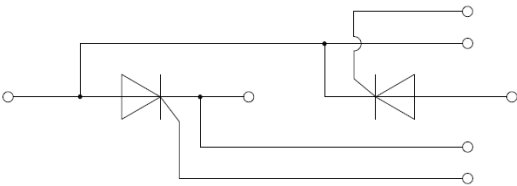

|  | °C |  |  |  |  |  |
|--|----|--|--|--|--|--|
|  | °C |  |  |  |  |  |
|  | °C |  |  |  |  |  |
|  | °C |  |  |  |  |  |
|  | °C |  |  |  |  |  |
|  | °C |  |  |  |  |  |
|  |    |  |  |  |  |  |
|  |    |  |  |  |  |  |
|  |    |  |  |  |  |  |
|  | °C |  |  |  |  |  |
|  |    |  |  |  |  |  |
|  | °C |  |  |  |  |  |



|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|  |  |  |  |  |  |

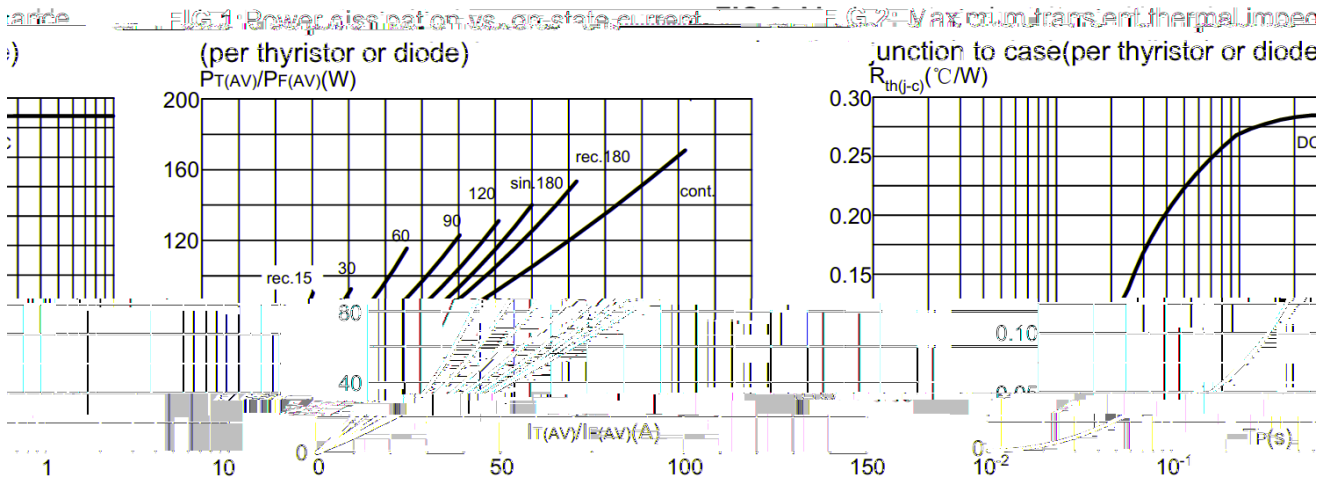


FIG.3: Forward characteristics

FIG.4: Relative variations of gate trigger current, holding current and latching current versus junction temperature

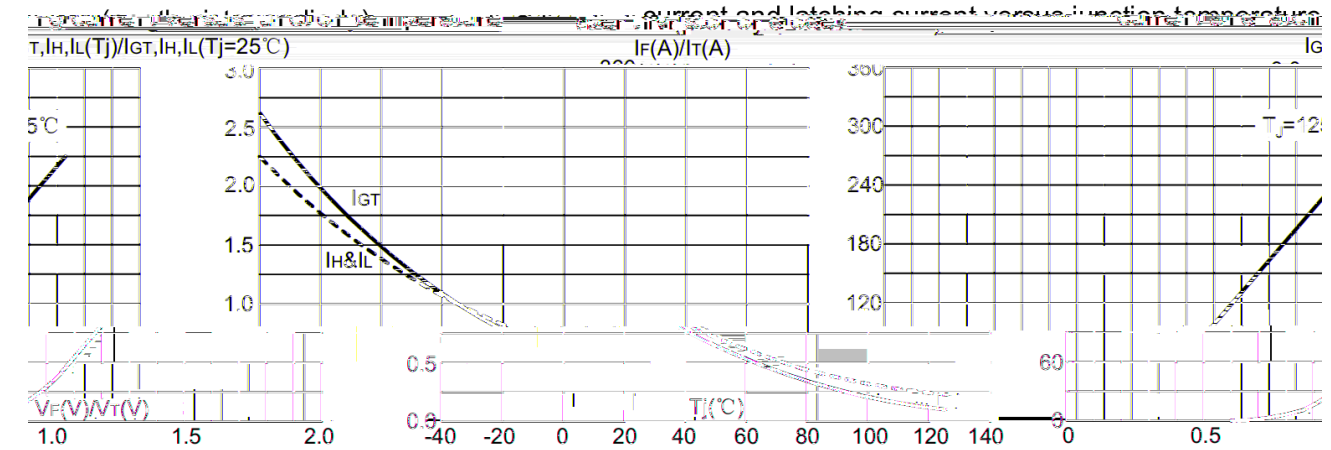


FIG.5: Gate trigger characteristics

FIG.6: Forward current vs. case temperature

